



Metallic Resources



MetaPaste™ NC-410 SC995e™
Lead Free No Clean Paste
Product Bulletin

An Excellent No Clean Paste

Metallic Resources' MetaPaste NC-410 is a general purpose mildly activated rosin based solder paste manufactured as a homogeneous mixture of special low oxide content lead free Sn99.5/Cu0.5/Co spherical solder powder and halide-free flux. It is RoHS compliant.

MetaPaste NC-410 No Clean solder paste has excellent re-flow, superior slump resistance, and high tolerance to humidity. Superior activity and wetting characteristics have been engineered into the product.

Physical Properties

Metal Load	88% (Standard)
Particle Size	Type 3 (25-45 microns) Type 4 (20-38 microns)
Viscosity	800-1,050 kcps
Stencil Life	12 – 14 hour
Tack Time	16 hour

Other metal loads, particle sizes, and viscosities are available upon special request. It is available in 10cc (40 gram) syringes, 250 and 500 gram jars, and 500, 700, or 1,000 gram cartridges

Standards Met

IPC J-STD-004 Standards
Type ROL0 classification

Resistivity to Water Extract: Pass
Silver Chromate Paper Test: Pass
Copper Mirror Test: Pass
Halogen Content: 0.0002
SIR: Pass > 1.10 x 10¹¹ohms

Application Directions

MetaPaste NC-410 No Clean solder paste has a shelf life of up to 6 months if kept refrigerated. Opened containers should be resealed when not in use.

Processing guidelines for paste preparation, printing, and reflow are found on page 2 of this bulletin.

Safety Precautions

MetaPaste NC-410 solder paste should be used in a well-ventilated area. If ventilation is inadequate, wear NIOSH approved respirator or equivalent. Wear suitable protective clothing, safety glasses, disposable vinyl gloves to avoid contact with skin and eyes. Refer to the Safety Data Sheet for additional information.

Do not dispose of any lead containing products in non-approved containers.



Metallic Resources, Inc.



Ph: 330.425.3155 | Fax: 330.425.2180

2368 E. Enterprise Parkway | Twinsburg, OH 44087

Recommended Processing Guidelines

Preparation

- Allow adequate time (8 hours) for the unopened refrigerated paste to equalize with ambient temperature.
- Mix the product lightly and thoroughly for several minutes prior to application.



Printing

- Tack Time is sixteen (16) hours between printing, placement and reflow under ambient conditions below 23°C/74°F and a relative humidity below 60%.
- The ideal temperature range for operation is 20°C/68°F – 23°C/74°F, with a relative humidity of 35-55%.
- The viscosity of this solder paste is 800 to 1,050 kcps on the Brookfield viscometer.
- Apply enough paste to the stencil to create a smooth even roll during the print cycle.
- Bead diameter of 1/2" to 5/8" is sufficient.

Squeegee Speed (in/sec)	90 D Squeegee Pressure (lb/in)	Metal Blade Pressure (lb/in)
1	1.6 – 1.8	1.6 – 1.8
2	2.4 – 2.6	2.1 – 2.2
3	3.4 – 3.6	2.4 – 2.6
4	4.8 – 5.1	2.8 – 3.1

Recommended Reflow Parameters

- Preheat Zone: Ramp to 150°C in 100 seconds to dry the volatiles from the solder paste.
- Soak Zone: Soak 80 seconds @ 150-190°C to get uniform temperature equilibrium of PCB.
- Reflow Zone:
 - Ramp to a temperature of 240°C to 250°C for a period of 40 seconds for the Ramp/Soak/Spike profile.
 - Ramp to a temperature of 235°C to 245°C for a period of 40 seconds for the optimized Ramp/Spike profile.
- Cooling Zone: A cool down rate of 2°C, or more, per second is recommended for optimum results.
- Cleaning Lag Time: Cleaning efficiency is not affected by lag time between reflow soldering and cleaning.

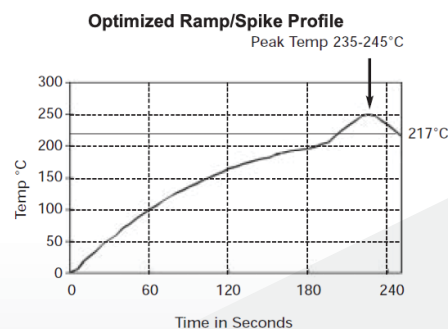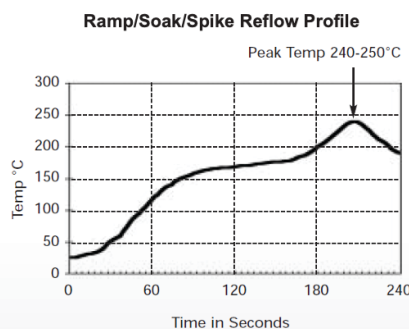

Metallic Resources, Inc.

Ph: 330.425.3155 | Fax: 330.425.2180
 2368 E. Enterprise Parkway | Twinsburg, OH 44087

NC-410-1122

DISCLAIMER. This Product Bulletin is provided for general informational purposes only. While the information contained in this Product Bulletin (and any recommendations made by Metallic Resources, Inc. ("MRI") and its authorized representatives relating to the subject matter of this Product Bulletin) is based upon test data, experiments, and experience and is believed to be reliable, no guarantee of accuracy is made. Statements made herein will vary according to the nature of the surfaces to which the product is applied, application technique, and service condition. All products are sold "as is" and upon the condition that the buyer will make their own tests and assume the responsibility for determining the suitability and fitness of the product(s) for their particular purpose. This Product Bulletin is not intended, and shall not be construed, to warrant or guarantee the performance of the described products. MRI shall not be liable for any loss or injury arising out of the use of the information contained herein or the use, misuse or inability to use any products designated herein. In any event, MRI assumes no liability beyond the purchase price of the products involved. As a condition of sale, MRI will (at its option and as buyer's sole and exclusive remedy) refund the purchase price or replace materials proven to be defective and reported in a timely fashion, but no later than six (6) months after shipment.